KALAP IBRIDO

NEW

BTL CATEGORIA SCONTO 24

Lampione solare ibrido / Hybrid solar post lamp

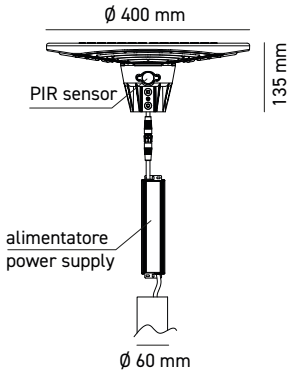

TUTTI I SETTORI SONO ATTIVABILI SOLO SIMULTANEAMENTE

ALL SECTORS CAN ONLY BE ACTIVATED SIMULTANEOUSLY

_ Testa palo (Ø60 mm) con sensore crepuscolare e rilevatore di presenza PIR
_ Tecnologia ibrida per combinare risparmio energetico e continuità luminosa
_ Batteria alta qualità LiFePO4 32700, 6,4V, 6000mAh, 38.4Wh
_ Pannello solare 12Wp
_ Tempo di ricarica solare: 6 ore
_ Materiale ABS + PC anti UV , autoestinguente
_ 2 modalità di funzionamento selezionabili e customizzabili tramite telecomando
_ CCT selezionabile
_ Telecomando incluso

_ *Pole head (Ø60 mm) with dusk sensor and PIR motion detector*
_ *Hybrid technology to combine energy savings and reliability*
_ *High-quality LiFePO4 32700 battery, 6.4V, 6000mAh, 38.4Wh*
_ *12Wp solar panel*
_ *Solar charging time: 6 hours*
_ *Self-extinguishing ABS + PC anti UV material*
_ *2 selectable and customizable operating modes via the remote control*
_ *Selectable CCT*
_ *Remote control included*

W	K	LUMEN APPARECCHIO lm		VARIANTE	CODICE	EAN		€ IVA ESCLUSA
30	3000 4000 6500	4800	140°	-	**KALAP48HY**	8031453034818	1/3	299,00
Batteria LiFePO4 32700 2 celle 6,4V 6000mAh per KALAP4800NK, KALAP48HY e YUMA4800NK					**B222064060A**	8031453033620	1	SU RICHIESTA UPON REQUEST

BOT LIGHTING S.r.l.
Via Lombardia, 37/39 – 30030 Cazzago di Pianiga (VE) Italy - T. +39 041 51 29 411
www.botlighting.it – info@botlighting.it - ordini@botlighting.it

KALAP HYBRID

_ **FUNZIONAMENTO**

L'apparecchio utilizza l'energia immagazzinata dalla batteria durante il giorno per poi passare all'alimentazione della rete elettrica solo quando la batteria scende sotto il 7% di capacità. Il proiettore ha due modalità di funzionamento, personalizzabili con il telecomando.

MODALITÀ SENSORE: l'apparecchio si accende automaticamente al tramonto al 10% di emissione luminosa. Quando viene rilevato movimento nel raggio di rilevamento dei sensori l'emissione luminosa passa al 100%, per poi tornare al 10% se per 20 secondi non viene rilevato alcun movimento. L'apparecchio si spegnerà al sorgere del sole.

MODALITÀ LUCE COSTANTE: l'apparecchio si accenderà al tramonto secondo le impostazioni di default: 60% di emissione luminosa costante per 3 ore. Dopo le 3 ore l'apparecchio passerà in MODALITÀ SENSORE. È possibile personalizzare i valori di emissione luminosa e durata del funzionamento in MODALITÀ LUCE COSTANTE tramite il telecomando.

_ ***OPERATION***

The device uses the energy stored in the battery during the day and switches to mains power only when the battery capacity drops below 7%.
The projector has two operating modes, customizable with the remote control.

SENSOR MODE: The device automatically turns on at sunset at 10% brightness. When motion is detected within the sensor's detection range, the brightness increases to 100%, then returns to 10% if no motion is detected for 20 seconds. The device will turn off at sunrise.

CONSTANT LIGHT MODE: The device will turn on at sunset according to the default settings: 60% constant brightness for 3 hours. After 3 hours, the device will switch to SENSOR MODE. It is possible to customize the brightness level and operating duration in CONSTANT LIGHT MODE using the remote control.

BOT LIGHTING S.r.l.
Via Lombardia, 37/39 – 30030 Cazzago di Pianiga (VE) Italy - T. +39 041 51 29 411
www.botlighting.it – info@botlighting.it - ordini@botlighting.it